



COMPARISON OF BREAKAGE CERAMIC/GLASS

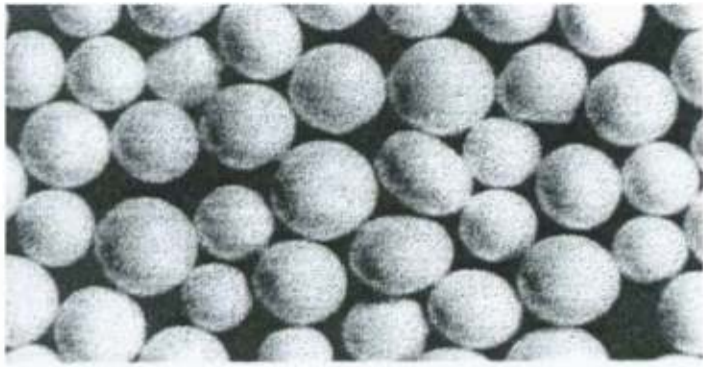


before
use

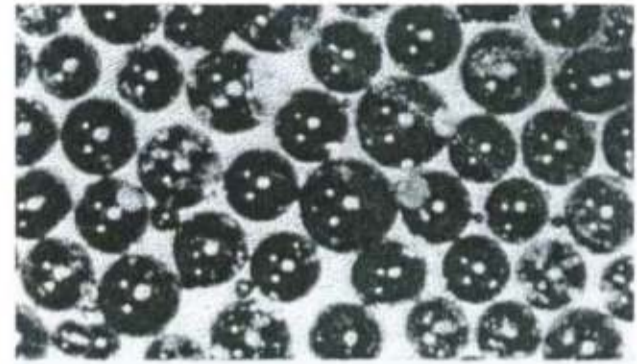

after
5 cycles



after
10 cycles

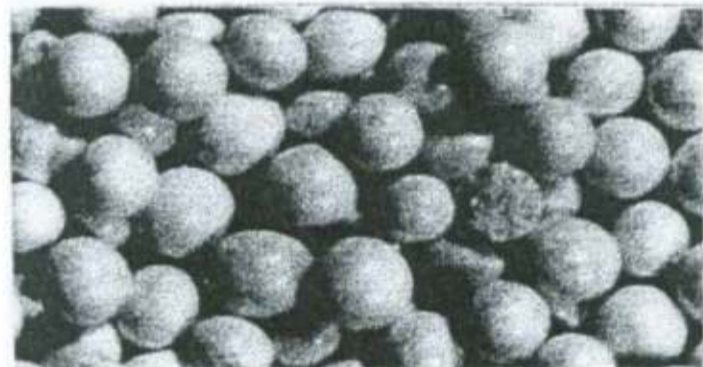

after
40 cycles



after
60 cycles

COMPARISON OF BREAKAGE CERAMIC/GLASS

Available sizes:

ZIRBLAST

Designation	Nominal diameter		
	MESH	mm	inches
B20	20/30	0.600-0.850	.023-.033
B30	30/40	0.425-0.600	.017-.023
B40	40/60	0.250-0.425	.010-.017
B60	60/120	0.125-0.250	.005-.010
B120	120/200	0.070-0.125	.003-.005
B125	-120	0-0.125	.000-.005

SUITABLE PROJECTION EQUIPMENT:

- Compressed air, dry or wet.
- Airless.

TREATMENT CHARACTERISTICS:

- Very good impact resistance.
- Low dust.
- Consistent surface finishing.
- Low embedment.
- No surface contamination (Fe_2O_3 : 0.1% max.).
- High depth of compressed layer.



Toll Free: 800-366-4341 Local: 757-548-4842 Fax: 757-547-9597
Email: info@nortonsandblasting.com